

**Before the  
Federal Communications Commission  
Washington, D.C. 20554**

In the Matter of	)	
	)	
	)	
	)	
Review of the Commission's	)	MM Docket No. 00-39
Rules and Policies	)	
Affecting the Conversion	)	
to Digital Television	)	
	)	
	)	
	)	

**COMMENTS**

ADC Telecommunications Inc. ("ADC") hereby submits these comments in the above-referenced proceeding. As described in greater detail below, the comments address the issue of the current 8VSB standard as requested in section 12 of the Notice of Proposed Rule Making adopted March 6, 2000 and referenced above. The comments generally request the Commission to consider clarifying the rules on Digital Television (DTV) broadcasting. The clarification would remove any ambiguity about the types of emissions that stations might choose to employ thus permitting several stations to operate on their allotted DTV channel when they might not be able to without such clarification.

Details

1. The Commission adopted a DTV Table of Allotments<sup>1</sup> ("Table") that includes channel assignments that are particularly difficult for certain DTV stations to accommodate. For example, stations that have a DTV allotted channel adjacent to authorized users in the land mobile service must take additional measures to avoid interference to these existing services. While the Commission could not reasonably be expected to take these additional services into consideration during the creation of the Table it is a requirement that affected stations take whatever actions are necessary to avoid interference with the existing, authorized services. Even in the case of NTSC operation, stations operating on certain channels (e.g. 2, 4, 5, 6, 7, 13, 14, 36, 38 and others) must account for non-television services that may be operating adjacent to their assigned frequency. Thus the issue is well known in the industry and not new to DTV.
2. The types of interference caused to non-TV services such as land mobile can be grouped into two categories. The first type is sometimes called blanketing interference or receiver overload. The second type is caused by out of band emissions from the DTV transmitter that

---

<sup>1</sup> *Sixth Report and Order* in MM Docket No. 87-268, 12 FCC Rcd 14588 (1997) ("*Sixth Report and Order*"), on recon., Memorandum Opinion and Order on Reconsideration of the Sixth Report and Order, 13 FCC Rcd 7418 (1998) ("Sixth MO&O"), on further recon., Second MO&O, FCC 98-315, 14 FCC Rcd 1348 (1998).

are sufficiently large so as to obscure the desired signal. Since DTV is a “noise like” signal it will be observed by the receiver as increased noise in the channel.

3. Blanketing interference occurs because practical receivers do not have infinite dynamic range. If the DTV signal is larger than the desired signal by a ratio greater than the dynamic range of the receiver then the desired signal cannot be received. Receivers vary in dynamic range performance but nearly all cases of this type of interference can be rectified at the receive site by filtering out the undesired DTV signal.
4. The second type of interference due to out of band emissions from the DTV transmitter exists even where a DTV transmission system meets all of the requirements of the existing out of band emissions mask adopted in the *Memorandum Opinion And Order On Reconsideration Of The Sixth Report And Order* MM Docket No. 87-268<sup>2</sup>. It is especially difficult for the spectrum user that is receiving unwanted interference because there is nothing that the user can do to eliminate the interference. It must be eliminated at the transmitter site. In NTSC systems the problem is well known and special filtering systems have been deployed to address the problem on those channels adjacent to existing non-TV services. Similar filtering systems are largely ineffective for DTV transmitters. This is because, unlike the NTSC TV signal, a DTV signal occupies 100% of the assigned 6MHz spectrum. There is no guard band between channels in DTV.
5. A technology has been developed that can create a guard band between DTV channels without changing the digital information as interpreted by the receiver. The technique is more completely described in Appendix A below. By using this technique it is possible to create filters capable of attenuating out of band emissions adjacent to the DTV channel by several orders of magnitude more than the current emissions mask requires. All known receiver technologies currently available are compatible with this technique. Indeed it is difficult to imagine a receiver that would not be compatible because the digital information contained in the I channel is not changed by this technique.
6. There are a number of stations that could benefit greatly from this technique. Those stations that find their allotted frequency adjacent to existing non-TV services would be able to put a DTV signal on the air without causing objectionable interference to adjacent services. A significant amount of laboratory testing has been done to verify that this is true. However each station at risk of causing interference would still be required by its construction permit to prove that there will be no objectionable interference caused by the DTV signal.
7. Stations having either so called N+1 or N-1 allocations with their NTSC channel could more easily combine the two transmitters into a single antenna thus eliminating a potential cause of delay in fielding a DTV transmitter.
8. The Commission should permit operation of DTV stations with a digital signal compatible with existing 8VSB receivers that has a small guard band on one or both sides of the channel edge. The amount of guard band can vary from zero (current 8VSB standard) to an absolute theoretical limit of 309 kHz (pilot frequency). A practical limit would be about 200 kHz per band edge. We recommend that the guard band be established at 150 kHz from either or both channel edges for those stations that seek to provide greater protection from out of band interference than the current emissions mask requires. A 150 kHz guard band will allow practical channel filters to be built which can produce high attenuation values at the channel edge without significantly affecting the amplitude of signal components 150 kHz inside the channel edge.

---

<sup>2</sup> Sixth MO&O, at ¶ 92.

9. As a hedge against future developments in receiver technology the Commission should also permit the use of the presently reserved VSB mode bits to indicate that a compatible 8VSB signal using a guard band is being transmitted. There are presently 24 reserved bits in the VSB Mode sequence of the VSB data field sync as shown in Figure 1. The present ATSC recommendation for handling these bits is as follows:

*These 24 bits determine the VSB mode for the data in the frame. The first two bytes are reserved. The suggested fill pattern is 0000 1111 0000 1111. The next byte is defined as:*

*P A B C P A B C*

*where P is the even parity bit, the MSB of the byte, and A,B, C are the actual mode bits.*

*P A B C*

*0 0 0 0 Reserved*

*1 0 0 1 Reserved*

*1 0 1 0 Reserved*

*0 0 1 1 Reserved*

*1 1 0 0 16 VSB*


*0 1 0 1 8 VSB\**

*0 1 1 0 Reserved*

*1 1 1 1 Reserved*

*\* In the 8 VSB mode, the preceding bits are defined as :*

*0 0 0 0 P A B C P A B C 1 1 1 1*

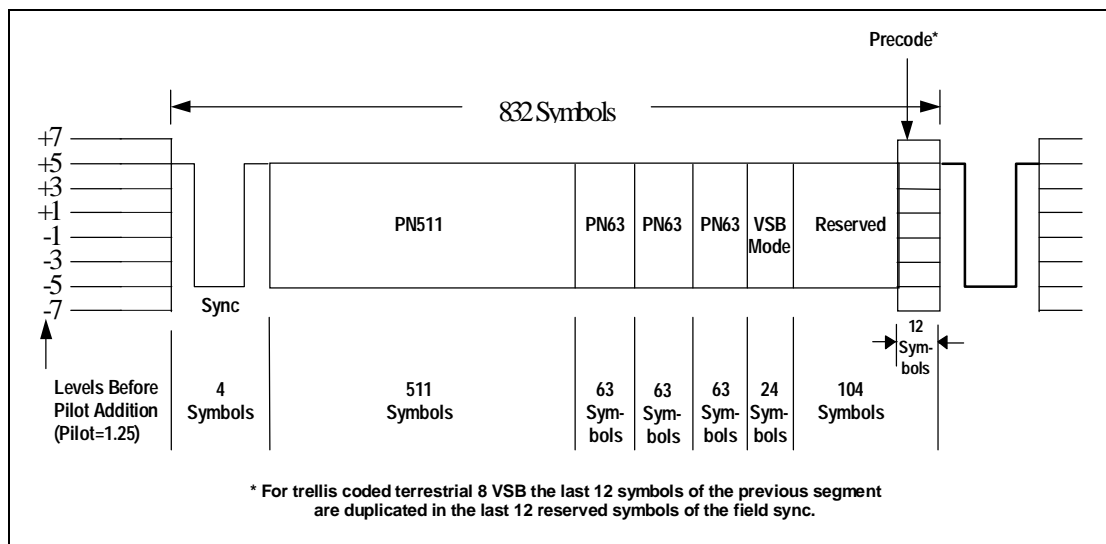

**Figure 1. VSB data field sync.**

VSB transmitters using the compatible system with a guard band should transmit these previously reserved 24 bits according to the following table:

VSB Mode	Reserved bit pattern	Comment
100% spectrum usage	0000 1010 0101 1111	Existing ATSC suggested pattern
Lower sideband 150kHz guardband	1001 1010 0101 1110	Protects lower adjacent channel
Upper sideband 150kHz guardband	1010 1010 0101 0101	Protects upper adjacent channel
Upper and lower sideband 150kHz guardband	0011 1010 0101 1100	Protects both upper and lower adjacent channels

The sequence preserves the sense of the parity bit in the MSB of each nibble as it is in the VSB mode now. (Note that in the 8VSB mode, the two middle nibbles are  $\sim P \sim A \sim B \sim C$  PABC or 1010 0101.) Since these bits were previously reserved there is no issue of compatibility with existing receivers thus maintaining the philosophy of the technique that it be completely benign to existing DTV consumers.

10. The technique described here represents just one of many possible methods of extending and improving VSB as a means of digital transmission. As more research is done it is likely that further compatible improvements will be developed. The demonstrated flexibility of VSB is one of the clear benefits of the existing standard.

## **A Compatible Narrowband 8VSB Transmission System**

**David L. Hershberger**  
**ADC Broadcast Systems Division**  
**McMurray, Pennsylvania**

### **Abstract**

This paper describes a method of compatibly reducing the bandwidth of an 8VSB signal. By careful choice of filter shapes, the bandwidth reduction can be made compatible with receivers, such that the demodulated I channel signal is identical to what would be produced by a standard 8VSB signal. A slight bandwidth reduction of only 100 to 200 kHz per band edge allows much more aggressive channel filters to be used. Sharper channel filters can greatly reduce or eliminate interference problems to adjacent services, such as two way radio users just below UHF channel 14.

### **Introduction**

The Federal Communications Commission has established a table of channel allocations for 8VSB digital television (DTV) stations. Some of these allocations create severe technical problems. For example, in some communities where a DTV allocation has been created for channel 14 (470-476 MHz), there are land mobile radio licenses very close to the lower edge of channel 14 – some as high as 469.975 MHz. It is extremely difficult to protect 469.975 MHz when the DTV signal has energy down to 470 MHz – just 0.025 MHz away. Power amplifier nonlinearities create a certain amount of out of band energy. Even though this out of band energy may be in compliance with FCC rules, it may still create problems to users of adjacent frequencies, who “were there first.”

Similar problems may exist where two way radio users are sharing spectrum in the UHF television band.

Another situation that is problematic is the “N+1” allocation. Here, a NTSC licensee is assigned a DTV channel that is on the next channel up from his NTSC signal. In this situation the aural carrier has significant sidebands that extend to within about 75 kHz of the channel edge, and therefore to within about 75 kHz of the DTV signal. This creates problems for stations that wish to use frequency selective combiners with separate NTSC and DTV transmitters.

Yet another problem exists in areas where radio telescopes are using channel 37 (608-614 MHz). Nearby broadcasters on channels 36 and 38 may adversely affect telescope operation with out of band emissions on channel 37.

Similarly, problems could exist with VHF channel 6 interference to noncommercial FM just above 88 MHz, and channels 4 and 5 could interfere with users of the 72-76 MHz spectrum.

These problems could be mitigated if the ATSC spectrum, which is rather “aggressive” when it comes to occupying a 6 MHz channel, could be just slightly reduced in bandwidth.

### **The ATSC 8VSB System**

The ATSC standard 8VSB transmission system, like many other digital transmission systems, includes a certain amount of “excess bandwidth.” The 8VSB system transmits symbols at a rate of 10.76223776... million per second, which requires a minimum theoretical bandwidth of 5.381118881... MHz (half of the symbol rate). Although this is a theoretical minimum, it is physically impossible to build a system that only uses the minimum bandwidth. As a practical matter, it is necessary to allow a certain amount of additional (“excess”) bandwidth for filter transition bands.

The 8VSB system has about 11.5% excess bandwidth. In other words, the 6 MHz channel width divided by 5.381118881... MHz is approximately 11.5% greater than unity.

To achieve an overall flat amplitude response between the transmitter and the receiver, the shape of the filtering in the transition bands has been specified to be the square root of a root raised cosine response, for both the transmitter and the receiver. When the filter response is applied twice, its magnitude response is squared, providing an overall raised cosine shape. When the I channel of the 8VSB signal is demodulated, it then has a flat amplitude response.

### **Channel Filters**

Modern channel filters developed for DTV applications have narrow transition bandwidths. The transition bandwidth is the frequency range over which the attenuation changes from near zero, close to the channel edge, to the out of band attenuation value a little bit farther from the band edge. In a sophisticated channel filter, the transition band can be as small as 150 kHz. Conventionally, these channel filters have very little attenuation at the channel edges, and reach a high attenuation value several hundred kHz outside the channel.

What this implies is that if just 150 kHz could be shaved off of the offending side of the spectrum (or from both sides of the spectrum), then the channel filter could be made slightly narrower, having a high amount of attenuation right at the channel edges. Services just outside the channel edges could have 30-60 dB of additional protection if the DTV signal’s bandwidth could be just slightly reduced.

It is possible to make the 8VSB signal narrower than 6 MHz, simply by reducing the 11.5% excess bandwidth to a lower value. But, this creates a problem with receivers. For example, if the transmitter is producing a 7% excess bandwidth signal with a root raised cosine response, and the receiver is filtering the signal with a root raised cosine 11.5% excess bandwidth filter, the overall response will not be flat. There will be frequency response bumps at low and high frequencies. Although a receiver’s adaptive equalizer

could flatten out the response, it would do so at the expense of signal to noise performance. The problem with such a unilateral approach at the transmitter is incompatibility with receivers.

## A Solution

Fortunately, there is a way to compatibly reduce the bandwidth of a DTV signal by several hundred kHz, which is enough to permit the use of passive channel filters and combiners that have significant attenuation at the channel edge. This method makes a bandwidth reduction, but without affecting receivers that are designed to receive a signal with the standard 11.5% excess bandwidth.

The bandwidth reduction method relies on two characteristics of the 8VSB signal. First, the transmitted information is contained entirely within the I channel. The only purpose of the Q channel is to make most of one sideband disappear. This characteristic can be exploited by reducing the bandwidth of the signal in such a way that only the Q channel is affected, and the I channel is unchanged. In the frequency domain, this means removing energy from the lower sideband, and replacing it with energy in the upper sideband.

Second, there is a small amount of inverted replicated spectrum just above the Nyquist rate in the transmitted I channel. When the symbols are extracted, which reduces the sampling rate to the symbol rate, energy above the Nyquist rate aliases to frequencies below the Nyquist rate. This characteristic can also be exploited to reduce the bandwidth. The I channel bandwidth can be reduced in the spectral tail above the Nyquist rate, by replacing energy removed with equivalent energy below the Nyquist rate.

## Details

The amplitude response in the transition band is given by:

$$R_{rc}(f) = \sqrt{0.5 + 0.5 \cdot \cos[\pi \cdot (f - f_t) / 2f_t]}$$

Where:

$f_t$  = half of transition band = pilot frequency = 309.4405594... kHz

$f$  = the frequency difference from the pilot (positive or negative)

Let:

$G(-f)$  = the frequency response being applied to the lower sideband, below the pilot.

The frequency response of the lower sideband becomes:

$$R_{rc}(-f) \cdot G(-f)$$

The attenuation provided by the function **G(-f)** has the effect of removing energy from the lower sideband. To keep the I channel the same, that energy may be added back in to the upper sideband.

To determine exactly how much energy to add back in to the upper sideband, use the following steps for every frequency in the LSB:

1. Determine the amount of LSB voltage lost.
2. Multiply this voltage by the amplitude response of the RRC filter in the receiver at the LSB frequency of interest.
3. Divide this result by the amplitude response of the RRC receiver filter at the equivalent USB frequency.
4. Add the resulting voltage to the upper sideband.

The normal response of the lower sideband is:

$$\mathbf{Rrc(-f)}$$

The reduced bandwidth amplitude of the lower sideband is:

$$\mathbf{Rrc(-f)*G(-f)}$$

So, the amount of “lost voltage” in the LSB is the difference between the two previous expressions, or:

$$\mathbf{Rrc(-f)-Rrc(-f)*G(-f)=rrc(-f)*[1-G(-f)]}$$

Weighting this by the LSB RRC response of the receiver gives:

$$\mathbf{Rrc^2(-f)-Rrc^2(-f)*G(-f)=rrc^2(-f)*[1-G(-f)]}$$

Dividing this by the RRC USB response of the receiver’s filter gives:

$$\mathbf{[Rrc^2(-f)-Rrc^2(-f)*G(-f)]/rrc(f)=rrc^2(-f)*[1-G(-f)]/rrc(f)}$$

The frequency response of the upper sideband becomes:

$$\mathbf{Rrc(f)+ rrc^2(-f)*[1-G(-f)]/rrc(f)}$$

For example, consider the case where **G(-f)** is given by the following:

## Appendix A

For  $f \geq 125$  kHz,  $G(-f) = 0$


For  $f \geq 0$  and  $f < 125$  kHz,  $G(-f) = 1 - f/125$  kHz

This will introduce a linear rolloff from the pilot frequency to 125 kHz below the pilot, and zero response beyond 125 kHz below the pilot. Some amplitude values are given in the following table:

<b>F</b>	<b>LSB (RRC)</b>	<b>LSB (narrowband)</b>	<b>USB (RRC)</b>	<b>USB (narrowband)</b>
300 kHz	0.023959	0	.9997129	1.0002871
200 kHz	0.2742153	0	.9616683	1.0398595
100 kHz	0.5069010	.1013802	.8620043	1.1004705
50 kHz	0.6119249	.3671549	.7909159	.9802923
25 kHz	.6608458	.5286766	.7505217	.8668987

Of course, other functions may be substituted for this particular **G(f)** to provide other shapes for the narrower bandwidth.

As long as any voltage removed from the lower sideband is replaced at the upper sideband at the same amplitude as seen by the receiver's I channel demodulator, the I channel demodulated signal will not be changed. Yet, the bandwidth of the signal is narrower.

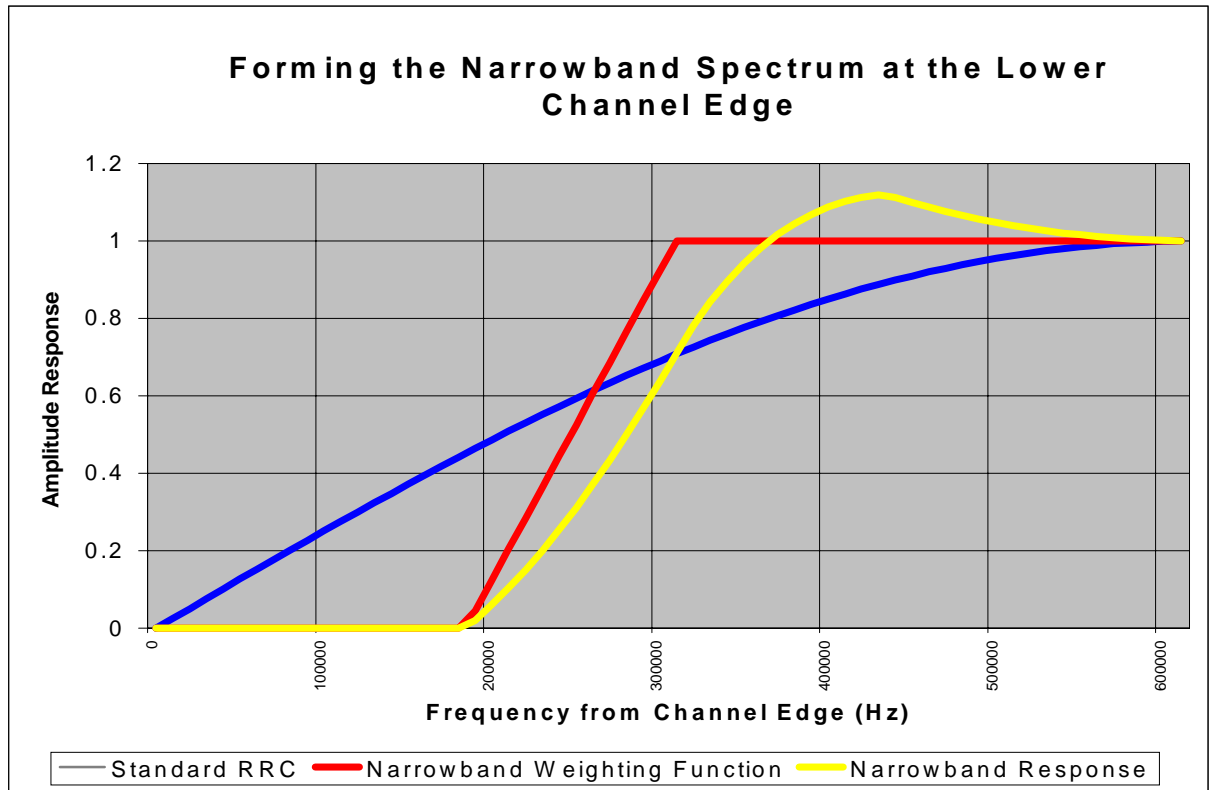

This figure shows the detail of how the narrowband 8VSB spectrum is formed in the vicinity of the pilot (approximately 309 kHz above the channel edge). The narrowband weighting function has a value of unity above the pilot frequency. Below the pilot, over a frequency of 125 kHz, the weighting function drops to zero. In the remaining range just above the lower channel edge (pilot minus 125 kHz or approximately 184 kHz), the weighting function has a value of zero. The removed lower sideband energy is multiplied by the expected RRC shape of the receiver. Then it is frequency inverted above the pilot, and divided by the receiver's RRC shape, and finally added to the response of the standard RRC shape. The result is the narrowband response shape shown in the figure. Importantly, the demodulated I channel of this signal is identical to that of a standard RRC 8VSB signal. This particular choice of shaping results in 184 kHz being removed from the vestigial lower sideband.

### **Extending the Concept to the Upper Band Edge**

The 8VSB system includes essential signal components in the baseband modulating signal that go all the way to the Nyquist rate (when sampled at the symbol rate). When the 8VSB signal is formed, the spectrum is flat to 5.071678332... MHz above the pilot. At that point the root raised cosine shape begins to roll off the spectrum. At half the symbol rate above pilot (5.381118881... MHz) the response is down 3 dB. Between this frequency and the channel edge (5.690559441... MHz above pilot) the ideal response transitions from -3 dB to zero amplitude.

Because baseband energy goes all the way to the Nyquist rate in 8VSB, the frequency components in the RRC transition range just below the Nyquist rate in the 8VSB signal (half the symbol rate or 5.381118881... MHz above pilot) are mirror images of the spectrum just above the Nyquist rate. The amplitudes of the mirrored spectra are not the same, but the frequencies are mirrored.


When the 8VSB signal is demodulated to symbols sampled at the symbol rate, frequency components within this transition region just above the Nyquist frequency, will alias to frequencies just below the Nyquist frequency. This aliasing at the demodulation end is intentional and necessary for the system to work properly.

As was the case in the transition region around the pilot, the spectral shape in the transition range at the upper channel edge can be modified without affecting the demodulated symbols. If energy is removed from the spectrum above the Nyquist rate, then it must be replaced at the equivalent frequency below the Nyquist rate. This spectral modification must consider the shape of the receiver's RRC filter.

To make the spectral modification to the upper band edge, substitute the 8VSB Nyquist rate (half the symbol rate plus the pilot frequency) for the pilot frequency, and interchange references to the upper and lower sidebands. In other words, remove energy from the frequency range between the Nyquist rate (5.381118881... MHz plus pilot or 5.690559441 MHz) and the upper channel edge, and compensate for the loss of energy by increasing the signal amplitude between pilot plus 5.071678322... MHz and pilot plus

5.381118881... MHz.

So, removing voltage from any frequency above the Nyquist rate, and replacing it at the same frequency below the Nyquist rate such that the frequency-transposed energy is the same at the receiver's demodulator after its RRC filtering, will not change the demodulated I channel signal after it is sampled. This is because the signal components above and below the Nyquist rate are mirror images of each other, and sampling a frequency component above the Nyquist rate by a frequency  $f$  will produce the same result as sampling a frequency component below the Nyquist rate by frequency  $f$ .

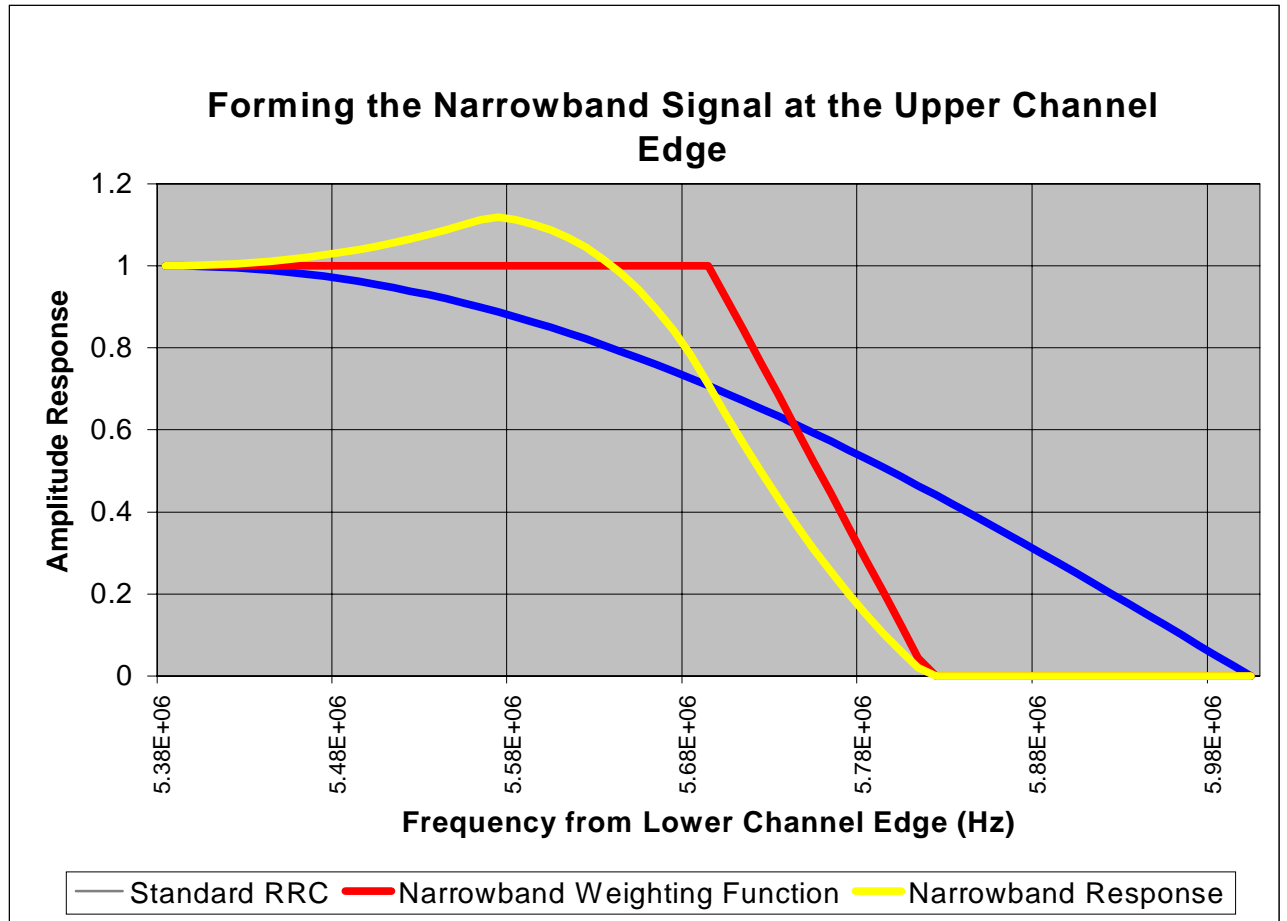

This figure, which is essentially a mirror image of the lower sideband figure above, shows the detail of how the narrowband 8VSB spectrum is formed at the upper channel edge. The narrowband weighting function has a value of unity below the Nyquist frequency. Above the Nyquist frequency, over a frequency of 125 kHz, the weighting function drops to zero. In the remaining range just below the upper channel edge (Nyquist frequency plus 125 kHz or approximately 184 kHz), the weighting function has a value of zero. The removed lower sideband energy is multiplied by the expected RRC shape of the receiver. Then it is frequency inverted above the Nyquist frequency, and divided by the receiver's RRC shape, and finally added to the response of the standard RRC shape. The result is the narrowband response shape shown in the figure. This

particular choice of shaping results in 184 kHz being removed from the upper sideband. Importantly, the demodulated I channel of this signal is identical to that of a standard RRC 8VSB signal.

## Filter Design

While this paper describes a method of producing filter shapes which will demodulate correctly in a standard 11.5% excess bandwidth receiver, there is no requirement to use any particular filter design method. There are many well known filter design algorithms which may be used to produce filters which will meet the specifications set out in this paper.

A suitable design method is to use the Parks-McClellan filter design procedure, which, in turn, uses the Remez algorithm.

For example, the following 128 filter coefficients are the first 128 values of the impulse response of a symmetrical 256<sup>th</sup> order filter for a Weaver modulator implementation of the particular narrowband 8VSB spectrum described above. This filter has a passband ripple of about 0.1 dB, and a stopband attenuation of about 65 dB:


3.628325E-04	-6.000522E-04	-2.366306E-03	-3.073699E-03
-1.451344E-03	6.857925E-04	8.411454E-04	-4.176315E-04
-6.61839E-04	2.99519E-04	5.384736E-04	-2.617595E-04
-4.5618E-04	2.546355E-04	3.961486E-04	-2.611832E-04
-3.480937E-04	2.749343E-04	3.063179E-04	-2.924158E-04
-2.672116E-04	3.112784E-04	2.280809E-04	-3.308854E-04
-1.876924E-04	3.506789E-04	1.449127E-04	-3.702461E-04
-9.902383E-05	3.891541E-04	4.980066E-05	-4.068929E-04
3.051773E-06	4.234508E-04	-5.91877E-05	-4.384037E-04
1.182099E-04	4.513138E-04	-1.794866E-04	-4.616347E-04
2.42067E-04	4.681326E-04	-3.056173E-04	-4.703579E-04
3.685901E-04	4.667144E-04	-4.301627E-04	-4.553552E-04
4.911573E-04	4.372383E-04	-5.488818E-04	-4.101423E-04
6.02634E-04	3.727492E-04	-6.516444E-04	-3.242859E-04
6.941199E-04	2.621333E-04	-7.319134E-04	-1.899532E-04
7.586739E-04	1.03193E-04	-7.745926E-04	-1.535478E-06
7.778655E-04	-1.149862E-04	-7.645711E-04	2.485024E-04
7.319169E-04	-4.00594E-04	-6.762365E-04	5.737777E-04
5.93837E-04	-7.712424E-04	-4.810862E-04	9.967176E-04
3.341716E-04	-1.25521E-03	-1.501516E-04	1.552136E-03
-7.353534E-05	-1.893648E-03	3.386813E-04	2.286433E-03
-6.461303E-04	-2.737301E-03	9.962169E-04	3.25365E-03
-1.387882E-03	-3.842199E-03	1.819697E-03	4.509306E-03
-2.290122E-03	-5.261099E-03	2.797515E-03	6.102438E-03
-3.342954E-03	-7.040816E-03	3.92574E-03	8.08091E-03
-4.547874E-03	-9.220721E-03	5.234013E-03	1.048834E-02
-5.982622E-03	-1.188374E-02	6.829642E-03	1.343403E-02
-7.816085E-03	-1.517673E-02	9.007661E-03	1.717647E-02
-1.050352E-02	-1.954075E-02	1.246001E-02	2.245214E-02
-1.514291E-02	-2.624444E-02	1.903638E-02	3.157824E-02
-2.512952E-02	-3.993826E-02	3.583379E-02	5.546171E-02
-5.903999E-02	-9.553206E-02	.1446489	.4556426

The 129<sup>th</sup> through the 256<sup>th</sup> coefficients are the same as the first 128 coefficients above, except that they are reversed in time order.

### Choice of Method

These methods may be applied to just the lower band edge, or just the upper band edge, or to both band edges simultaneously, depending on the purpose for reducing the bandwidth of the 8VSB signal.

For example, if the problem is protecting two way radio allocations just below channel 14, it may only be necessary to reduce the bandwidth at the lower band edge. Or, if an educational FM station at 88.1 MHz would suffer interference from a new DTV allocation at channel 6, then only the upper band edge of the 8VSB signal would need to be reduced.

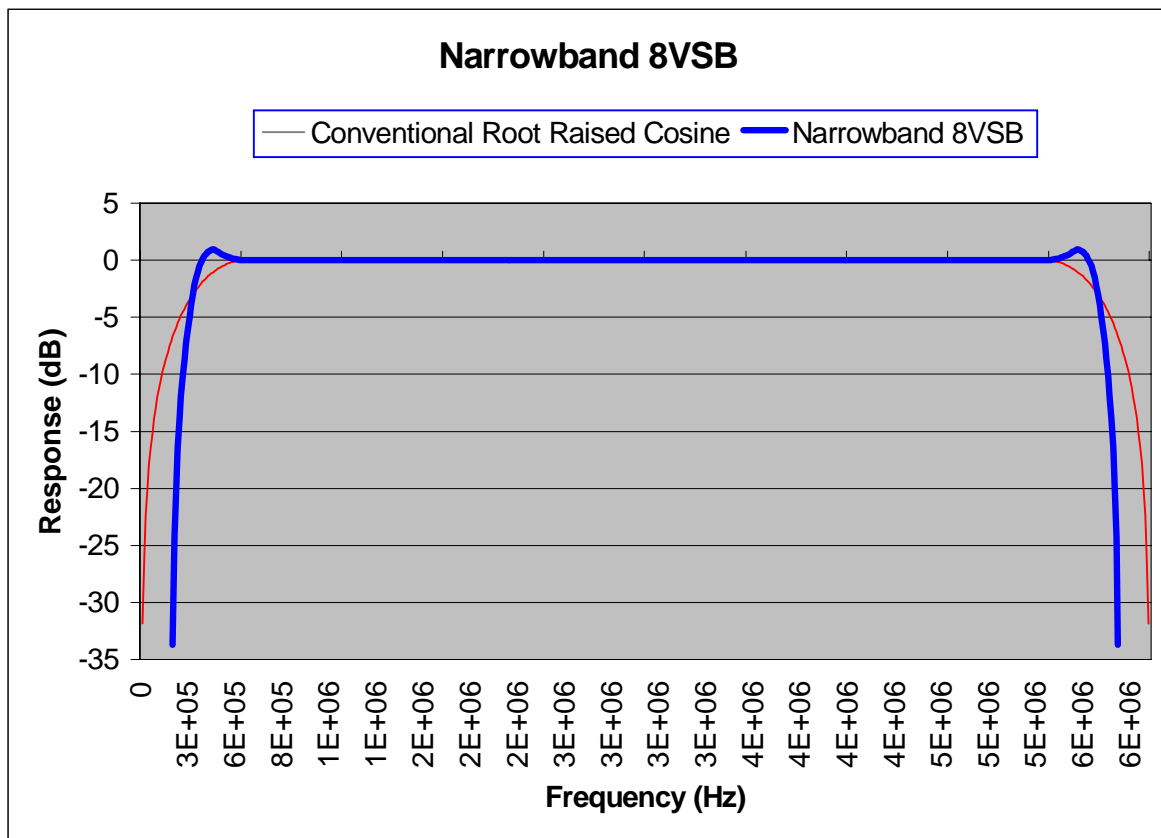

**Spectrum Shapes for Standard and Narrowband 8VSB**

This figure shows the bandwidth saving of the narrowband 8VSB system for the  $G(f)$  function given above, with bandwidth reduction being applied to both edges of the channel. With this particular  $G(f)$  function, there is enough energy being removed from the channel edges to make the in-band response rise by approximately 1 dB.

For the maximum amount of bandwidth reduction on just one channel edge, both sides of the spectrum could be reduced, and then the resulting spectrum could be frequency shifted to one side or the other by the amount of the bandwidth truncation on one side. In


these examples, with 184 kHz removed from each side, and with the resulting spectrum shifted by 184 kHz, a total guard band of 368 kHz could be created on one side of the spectrum.

### Weaver Modulator Implementation

A Weaver modulator uses a pair of lowpass filters to do spectral shaping. In the most basic form of a Weaver modulator, the spectrum must be symmetrical because the lowpass filter pair determines the shape of the two band edges simultaneously. In other words, the cutoff frequency of the Weaver lowpass filters maps to both the upper and lower edges of the output spectrum.

So, implementation of narrowband 8VSB is straightforward in a Weaver modulator when the bandwidth is reduced on both sides (i.e. symmetrically). However, if the bandwidth of the 8VSB signal is to be reduced on only one side, then a Weaver implementation becomes more complex.


One method would be to first create a standard Weaver modulator, designed to produce a symmetrical spectral shape corresponding to the spectral edge that is wider. Then, frequency offset the Weaver baseband signals, and filter again with a second set of Weaver lowpass filters that will form the spectral shape of the narrower spectral edge.

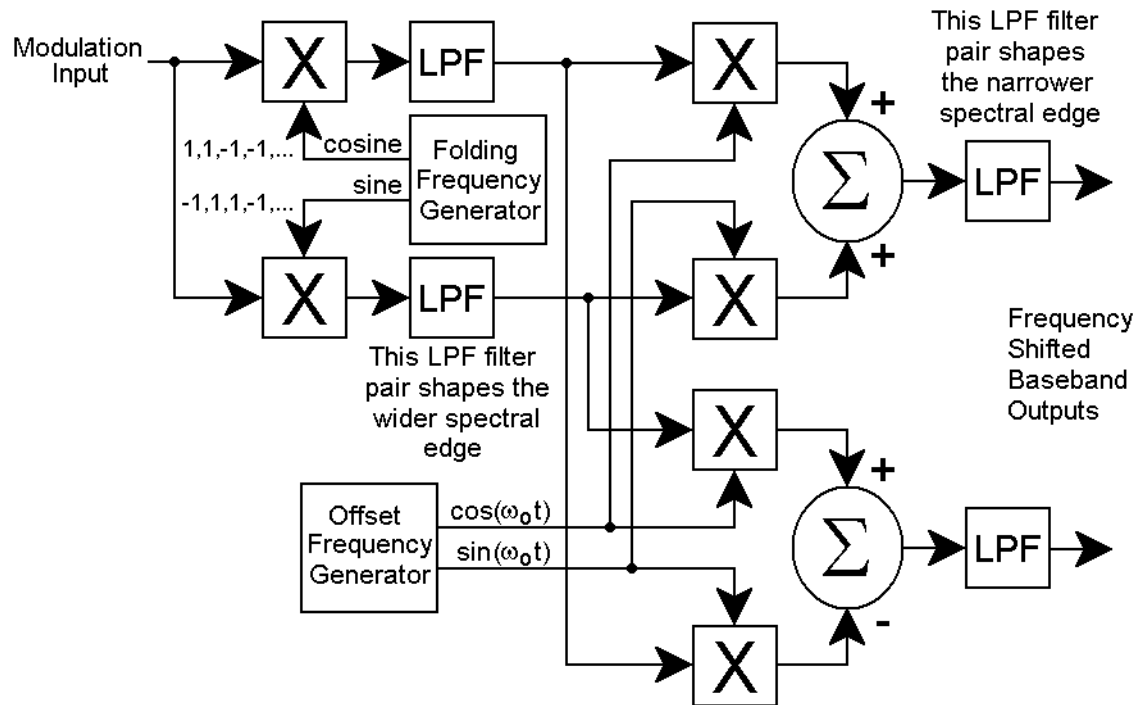

### Producing an Asymmetrical Spectrum with Weaver Modulation

If a narrowband spectrum is required only at the high edge of the channel, another method is available. This method would require sampling at a rate higher than the symbol


rate. First, filter the symbols with a lowpass characteristic which, when multiplied by the standard root raised cosine bandpass response, will result in the desired upper sideband spectral shape. Then, apply the resulting filtered symbols to a standard Weaver modulator.

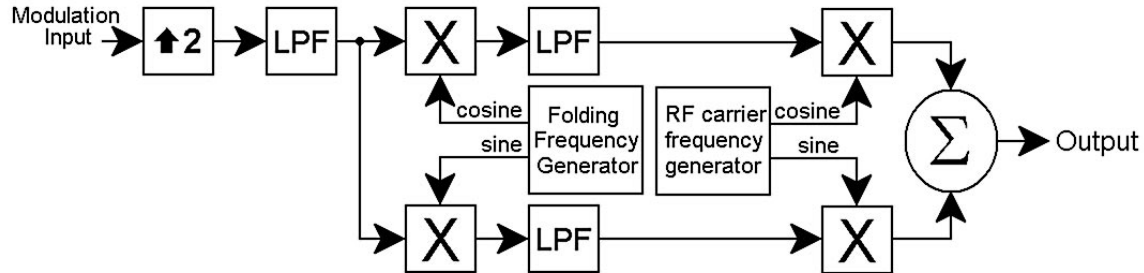

### Producing a Narrowband 8VSB Signal with Spectral Limiting at the Upper Band Edge Only

The narrower upper sideband is shaped by the lowpass filter, and the standard RRC lower sideband is shaped by the Weaver filters. In this example, the Weaver modulator sampling rate is twice the symbol clock frequency.

### Bandpass Filter Implementation

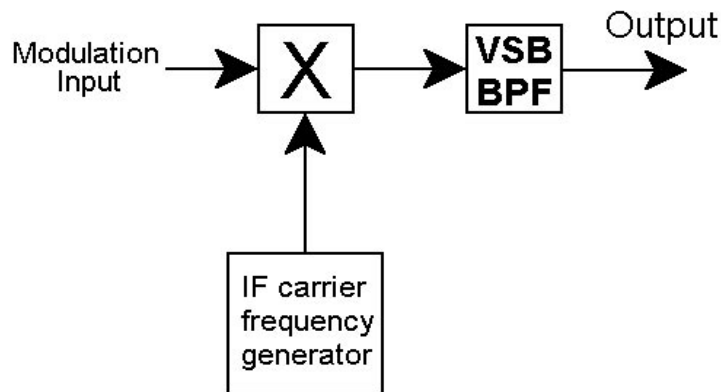

### Basic Bandpass Filter VSB Modulator

The bandpass filter method for generating 8VSB signals is simple. The modulation input, consisting of the symbols plus pilot, is multiplied by an IF carrier frequency. The resulting double sideband signal is bandpass filtered to produce a vestigial sideband signal. The VSB bandpass filter is designed to produce the desired root raised cosine shape. Any spectral shape may be obtained, simply by producing a bandpass filter that


produces the desired spectrum.

The bandpass filter implementation of an 8VSB modulator is conceptually the simplest. But it also generally requires a higher rate of calculation than the Hilbert transform modulator and the Weaver modulator. More filter taps are generally required, and at a higher sampling rate than the Weaver and Hilbert systems, which operate at baseband frequencies.

The conceptual simplicity of the bandpass filter implementation makes adaptation to narrowband 8VSB generation easy. All that is required is a bandpass filter that produces the desired special narrowband spectral shape, which is described above.

### Hilbert Transform Modulator Implementation

Another method for generating 8VSB signals is the Hilbert transform modulator. The Hilbert transform modulator, as used in 8VSB modulators, is shown below.

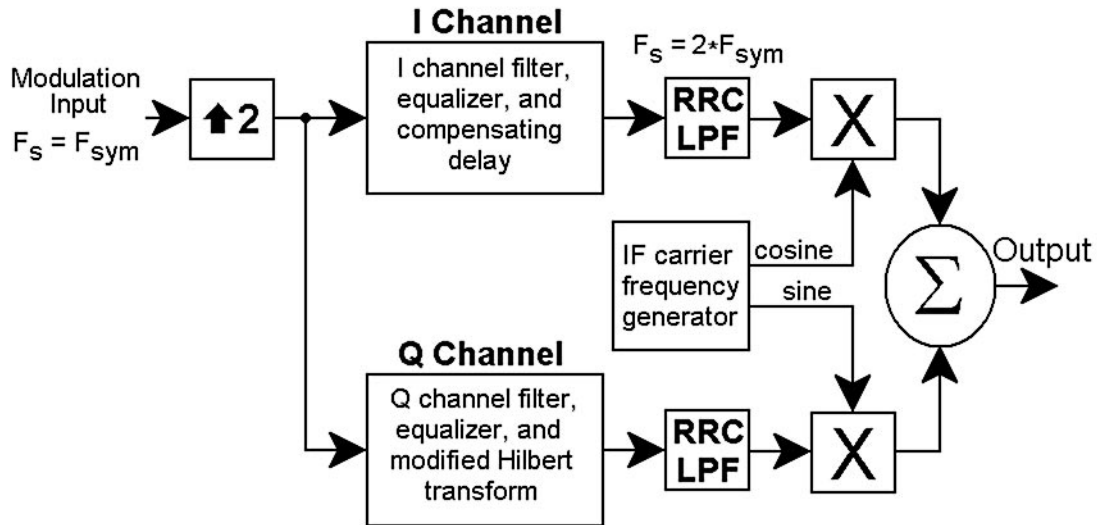

### Hilbert Transform Modulator for Producing 8VSB Signals

The Hilbert transform modulator accepts the modulating signal, which is symbols plus pilot. In the implementation shown here, the modulation input is first interpolated by two to a sampling frequency of 21.52447552... MHz. This is necessary because the highest frequency to be produced will be 5.690559441... MHz (6 MHz channel width minus the pilot frequency), slightly higher than the Nyquist frequency for symbol rate processing (10.76223776... MHz).

In the Hilbert transform modulator, the frequency response of the I channel at any modulation frequency must be proportional to the sum of the voltages to be produced in the upper and lower sidebands at that frequency. Similarly, the frequency response of the Q channel at any frequency must be proportional to the upper sideband voltage minus the


lower sideband voltage at that modulation frequency.

Moreover, the input interpolator must necessarily produce a certain amount of aliasing since the input spectrum extends from DC to the Nyquist rate with no guard band. This aliasing is actually desirable and must appear as a partial inverted replicated spectrum in the spectral tail at the upper sideband edge. The response of the input interpolator and the I and Q channel filters together will determine the spectral shape of the spectral tail at the upper channel edge.

The I channel filter is linear phase. The I channel filter includes a 3 dB “bump” in its frequency response that represents the difference between raised cosine (where the pilot would be down 6 dB) and root raised cosine (where the pilot is only down 3 dB). The overall interpolator/I channel response at the high frequency end has the root raised cosine shape.

The Q channel filter has a phase shift of 90 degrees at all frequencies within its bandpass. The rolloff of the Q channel filter at low frequencies determines the sideband asymmetry (i.e. level of vestigial sideband) near the pilot carrier.

The following figure shows the frequency response of the I and Q channels in a Hilbert transform modulator for conventional root raised cosine 8VSB signals.

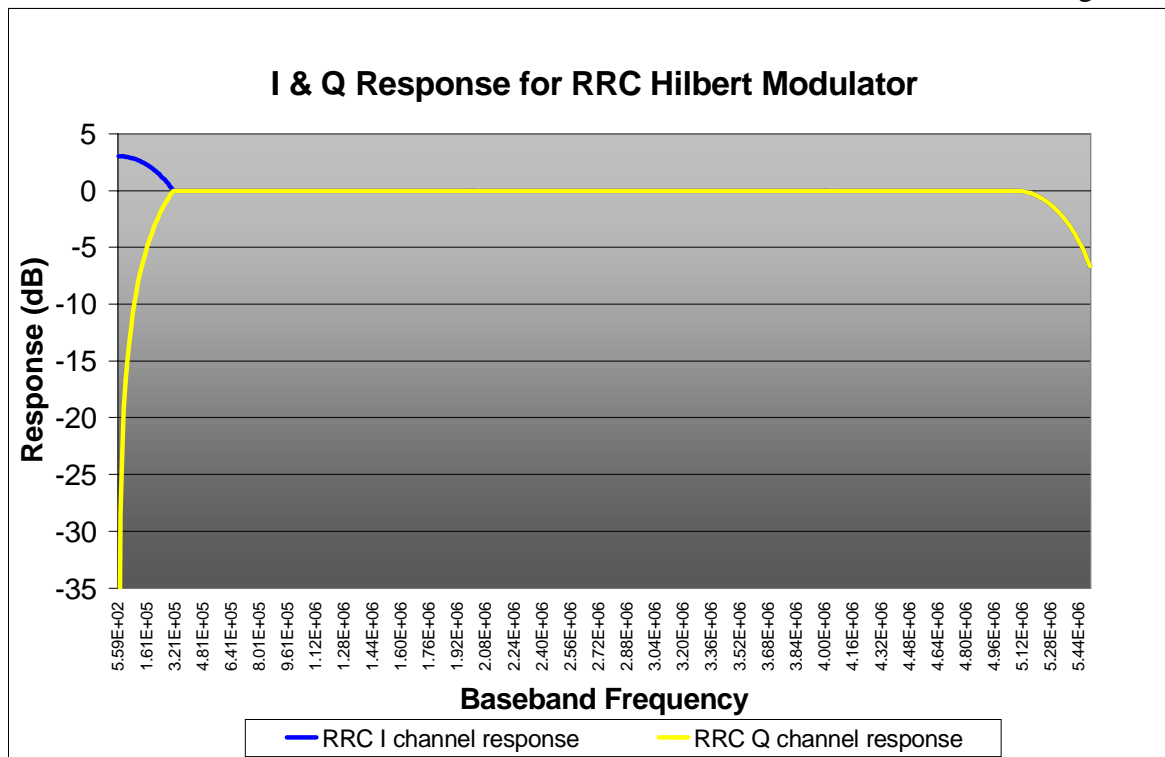


Notice that in the low frequency area, corresponding to the vestigial sideband portion of the spectrum, that the I and Q channel responses are unequal. As the Q channel amplitude approaches zero, the resulting spectrum at those frequencies approaches double sideband.

Where the I and Q channel responses are equal, the resulting spectrum is single sideband.

To modify a Hilbert transform modulator to produce a narrowband 8VSB signal, it is necessary to modify both the I and Q channel frequency responses. Given a particular spectral shape, the I channel response is the sum of the upper and lower sideband shapes, and the Q channel response is the difference between the upper and lower sideband shapes.

At low frequencies, near the pilot, the I channel response will actually be the same for both conventional RRC 8VSB and for narrowband 8VSB. The I channel response will be different from the RRC case only if the upper spectrum edge is made narrowband.

The following figure shows the I and Q channel responses for a narrowband 8VSB Hilbert transform modulator.

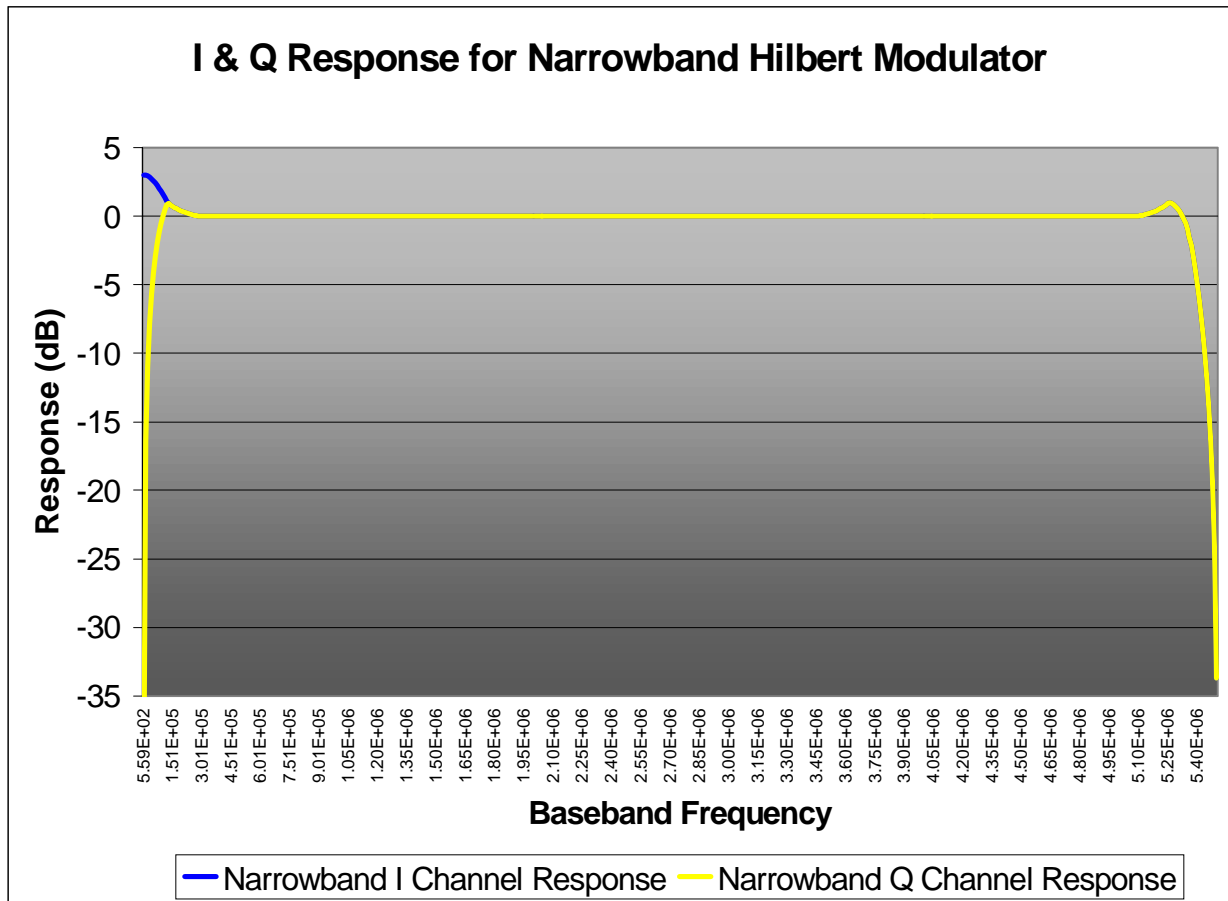

The I channel response at low frequencies is exactly the same as it is in the standard RRC case. The Q channel response extends lower, corresponding to a smaller sideband vestige. The I channel, together with the Q channel, form a bump at the high frequency end, followed by a steeper rolloff just above half the symbol rate (symbol clock Nyquist rate). The high frequency deviation in frequency response removes aliased energy from just above the symbol clock Nyquist rate, and replaces it with equivalent non-aliased energy. The result is that the demodulated I channel, when resampled at the symbol rate, is

exactly the same as it would have been with standard RRC modulation.

### **Receiver Compatibility Issues**

When a narrowband 8VSB signal is received, the demodulated I channel signal, after it is resampled to the symbol rate, will be exactly the same as it would be with a conventional 8VSB signal. However, several factors may still affect receiver compatibility.

*Use of the Q channel by the receiver equalizer.* If the receiver's equalizer uses the Q channel in addition to the I channel, then there could be problems because the Q channel is modified. For example, the receiver could try to force the spectral shape to 11.5% RRC before demodulation. This would boost the receiver's response, and thereby noise, near the channel edges.

*Operation of the receiver equalizer in a bandwidth larger than half the symbol rate.* If the receiver equalizer operates on the demodulated I channel, but in a bandwidth higher than half the symbol rate, then it could sense the reduced energy just above the Nyquist rate and try to boost it (and any noise) up to the level it would be with a standard signal.

*PLL Issues.* Reduction of the spectrum in the vicinity of the pilot will have the effect of increasing the amount of low frequency energy in the Q channel of the receiver. The recovered carrier may have an increased amount of undesired phase modulation or jitter depending on the design of the receiver's PLL and in particular, its bandwidth.

Receiver manufacturers are not anxious to discuss their proprietary circuitry. So, we did not have much cooperation from receiver manufacturers in trying to determine what effect, if any, the narrowband 8VSB signal would have on the receivers. So the next best thing was to make measurements on a sampling of receivers from different manufacturers. Receivers were tested for input signal level requirements first with a standard 8VSB signal, and then with the narrowband 8VSB signal.

Six different models of receivers have been tested to see if they correctly demodulate the narrowband 8VSB signal, and success was achieved with all. The receivers were marketed by Panasonic, Sony, Thomson Consumer Electronics, Philips, Zenith, and Harris. Threshold measurements were made on two of the receivers (Thomson and Harris). Both of these receivers showed only a 1 dB penalty for the narrowband signal.


### **Transmitter compatibility**

The transmitted bandwidth of the narrowband 8VSB signal is narrower by design. A signal that is narrower than standard will not create any problems with a transmitter. However, retuning of the channel filter will be required to take maximum advantage of the narrowband signal.

Another issue is peak to average ratio. Peak to average ratio is only slightly higher with the narrowband 8VSB signal as implemented. With a 368 kHz reduction in bandwidth,

the peak to average ratio is only 0.5 dB higher than with a standard signal.

### Practical Results

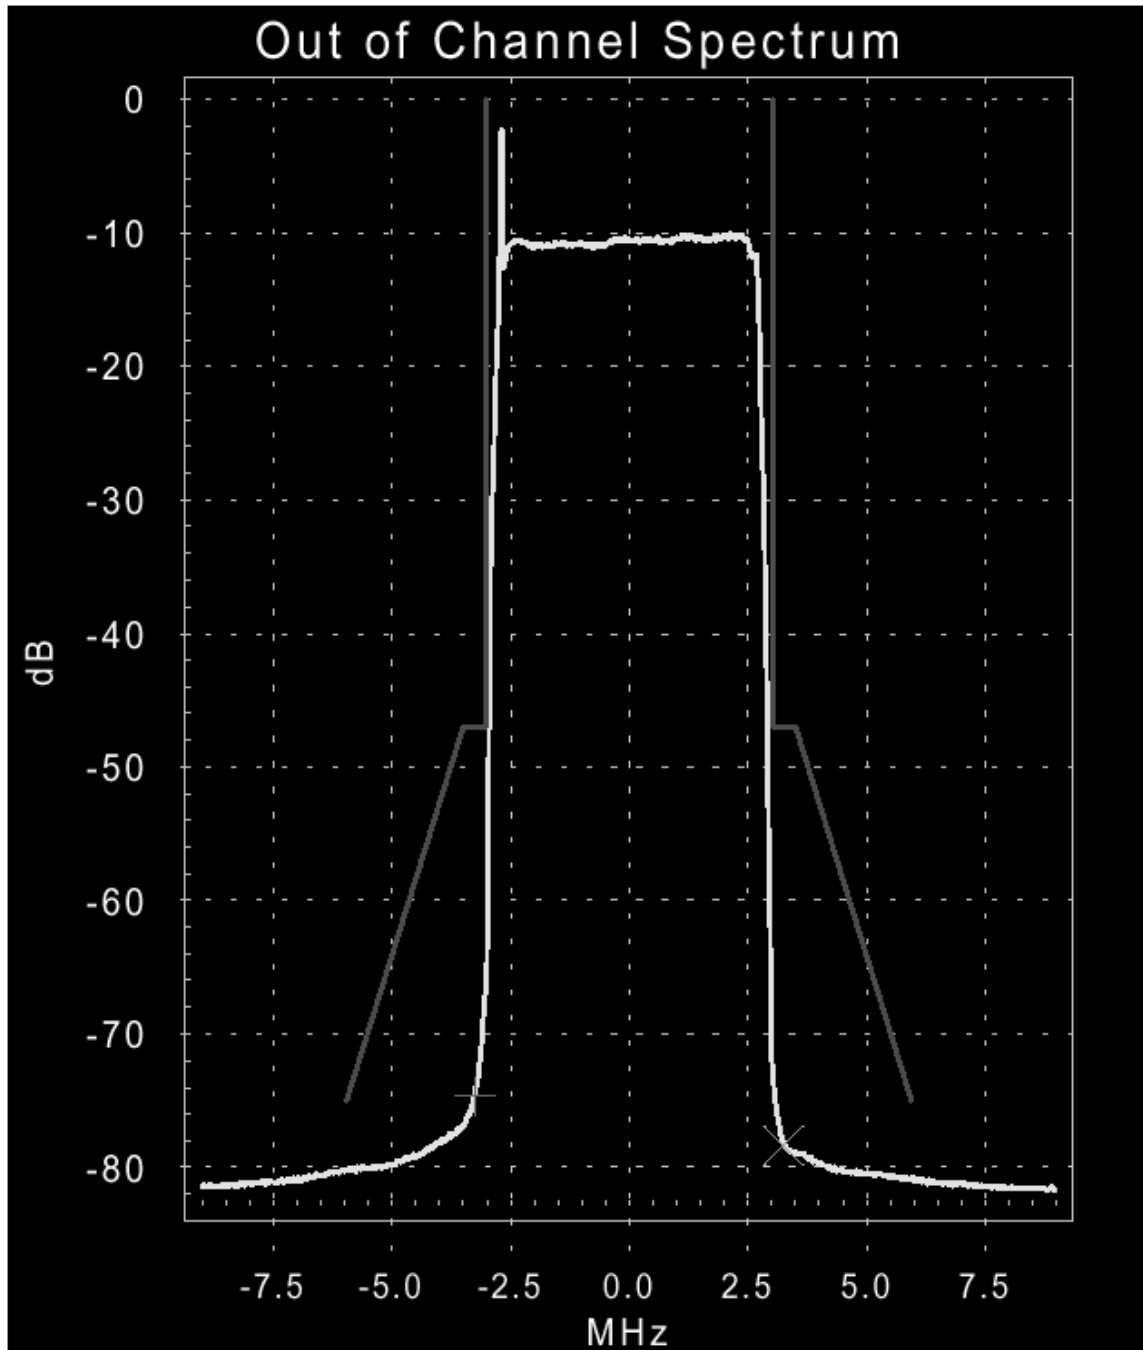

This figure is taken from the spectrum display of a Tektronix RFA300. This is the output of a solid state transmitter operating in narrowband mode, with a channel filter designed especially for the narrowband spectrum. It is evident from this display that the transmitter exceeds the FCC's channel mask by a wide margin.

## **Future Development**

Proposed areas for future development include:

1. Doing more research to optimize the exact shape of the bandwidth reduction to minimize low frequency Q channel energy, thereby improving receiver PLL performance.
2. Optimization of the spectral tail shaping for different applications.

## **Standards Issues**

Standardization of the narrowband variant of the 8VSB signal by the ATSC, and use of presently reserved data field sync VSB mode bits, would allow receiver manufacturers to know when their equipment is receiving a narrowband signal, and to accommodate the slightly different spectral characteristics. Receiver manufacturers may wish to optimize performance when receiving the narrowband 8VSB signal with slightly modified IF bandpass filter characteristics, PLL constants, and adaptive equalizer designs. Use of the ATSC mode bits will allow the receivers to easily recognize the narrowband 8VSB signal.

For existing receivers, the evidence suggests that they already are capable of receiving the narrowband 8VSB signal without any modifications.

We are ready and willing to work with receiver manufacturers and others to apply this technology and solve interference problems.

## **Conclusion**

Narrowband 8VSB can be used to get stations on the air which would have otherwise insurmountable problems. In some instances, some form of narrowband transmission may be the only way to solve an interference problem. In these cases, narrowband 8VSB will allow stations in these situations to get on the air and to make best use of the available spectrum.